

# 5M MOTORIZED EYEBALL CAMERA


2.7~13.5mm Lens



## Feature

- 5MP ( 2592 x 1944 ) @ 30fps
- Max. Resolution: 2592 x 1944
- Supports Smart H.265/H.264 Encoding
- True Day & Night ICR
- 45M IR Distance
- Motorized Varifocal 2.7-13.5mm Lens
- 3D DNR, True WDR, HLC, BLC and ROI Encoding
- Supports Triple Streams
- Operating Temperature: -30°- 55°C
- DC12V / PoE (802.3af, ≤6W)
- Built-in MicroSD Card Slot
- Built-in Reset Button

## Dimension

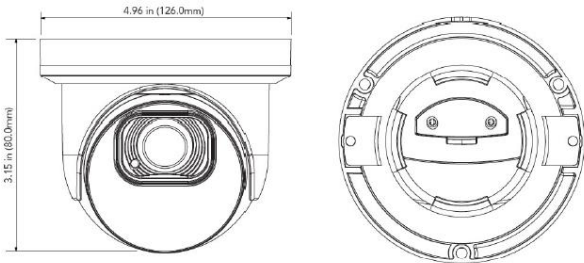

## VVK-NSE51Z

### Specification

|                        |   |
|------------------------|---|
| <b>CAMERA</b>          |   |
| Image Sensor           | 1/2.7" Progressive Scan CMOS  |
| Resolution             | 5MP   |
| Image Size             | 2592 x 1944   |
| Min. Illumination      | Color: 0.05lux @ F1.2(AGC ON)<br>BW: 0lux w IR ON   |
| Shutter Speed          | 1/20,000s ~ 1/5s  |
| IR Distance            | 45M   |
| Lens                   | Motorized Varifocal 2.7-13.5mm  |
| Field of View          | Horizontal: 101 ~ 32°, Vertical: 71 ~ 23°, Diagonal: 129 ~ 40°                                    |
| <b>VIDEO STREAM</b>    |   |
| Max. Image Resolution  | 2592 x 1944 @ 30fps   |
| Supported Resolutions  | 2592 x 1944, 2592 x 1520, 2304 x 1296, 2048 x 1535, 1920 x 1080, 1280 x 720, 640 x 480, 320 x 240 |
| <b>NETWORK</b>         |   |
| Ethernet               | 1 x RJ45 10M / 100M(BASE-T)   |
| ONVIF                  | ONVIF Profile S / G   |
| Protocol               | HTTP, HTTPS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP/IP, PPPoE, DHCP                |
| <b>IMAGE</b>           |   |
| Language               | Support for English and Korean  |
| <b>VIDEO ANALYTICS</b> |   |
| Supported Recorders    | Diversity Series  |
| On-Board Storage       | Micro SD slot, up to 256GB  |
| Alarm/Audio            | 1 input, 1 output / 1 input (RCA), 1 output (RCA)   |
| Hardware Reset         | Yes   |
| Smart Feature          | PID,LCD,PD/VD,FD  |
| Smart Events           | Human Detection, Face Detection, Vehicle Detection  |
| Alarm Link Events      | Motion Detection, Sensor Alarm  |
| <b>GENERAL</b>         |   |
| Angle Adjustment       | Any Angle   |
| Input Voltage          | DC 12V / PoE (IEEE802.3af)  |
| Power Consumption      | ≤6W   |
| Ingress Protection     | IP67  |
| Working Temperature    | -30°~55° C  |
| Dimensions             | Ø126 X 80 mm  |
| Weight                 | Approx. 846g  |