

5M IP Indoor Dome Camera

2.7-13.5mm Motorized Lens





Feature

- 5MP (2592 x 1920) @ 30fps
- Max. Resolution: 2592 x 1920
- Supports Smart H.265/H.264 Encoding
- True Day & Night ICR
- 30M IR Distance
- Motorized 2.7-13.5mm A/F Lens
- 3D DNR, True WDR, HLC, BLC and ROI Encoding
- Supports Triple Streams
- Operating Temperature: -30°- 55°
- DC12V / PoE (802.3af, ≤6W)

Dimension

Unit : inch (mm)

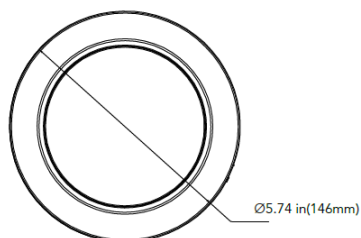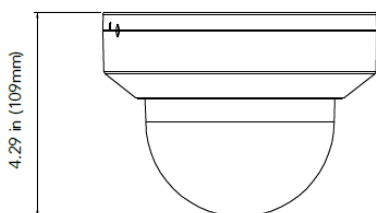

VVK-NSD51Z

Specification

CAMERA

Image Sensor	1/2.8" Progressive Scan CMOS
Resolution	5MP
Image Size	2592 x 1944
Min. Illumination	Color: 0.05lux @ F1.2(AGC ON) BW: 0lux w
Shutter Speed	1/20,000s ~ 1/5s
Slow Shutter	Supported
IR Distance	30M
Lens	Motorized 2.7 - 13.5 mm
Field of View	Horizontal: 101 ~ 32°, Vertical: 71 ~ 23°, Diagonal: 129 ~ 40°
WDR	120dB

VIDEO STREAM

Max. Image Resolution	2592 x 1944 @ 30fps
Supported Resolutions	2592 x 1944, 1920 x 1080, 1280 x 720, 640 x 480, 320 x 240

NETWORK

Ethernet	1 x RJ45 10M / 100M(BASE-T)
ONVIF	ONVIF(Profile S/G/T, 20.06)
Protocol	HTTP, HTTPS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP/IP, PPPoE, DHCP
Security	IP Address Filter; Complicated Password; Authenticated Username and Password

IMAGE

Day & Night	IR cut filter with auto switch (Day/Night/Auto/Schedule)
True WDR	Yes
Language	Support for English and Korean

VIDEO ANALYTICS

Supported Recorders	Diversity Series
On-Board Storage	Micro SD slot, up to 256GB
Alarm/Audio	1 input, 1 output / 1 input(RCA), 1 output(RCA)
Hardware Reset	Yes
Smart Alarm	Face Recognition (FR) Human & Vehicle Detection (PD&VD) Perimeter Intrusion Detection (PID) Line Crossing Detection (LCD) Cross Counting (CC)
Smart Analytics	Stationary Object Detection (SOD) Heat Map (HM) Crowd Density Detection (CD) Queue Length Detection (QD) license Plate Detection (LPD) Rare Sound Detection (RSD)

GENERAL

Angle Adjustment	Any Angle
Input Voltage	DC 12V / PoE (802.3af)
Power Consumption	≤6W
Weight	Approx. 451g
Working Temperature	-30°~55°
Dimensions	Ø146 x 109mm