

5M IP Indoor Dome Camera

2.8mm Fixed Lens




Feature

- 5MP (2592 x 1944) @ 30fps
- Max. Resolution: 2592 x 1944
- Supports Smart H.265/H.264 Encoding
- True Day & Night ICR
- 20M IR Distance
- Fixed 2.8mm Lens
- 3D DNR, True WDR, HLC, BLC and ROI Encoding
- Operating Temperature: -30°- 55°C
- DC12V / PoE (802.3af, ≤6W)

Dimension

Unit : inch (mm)

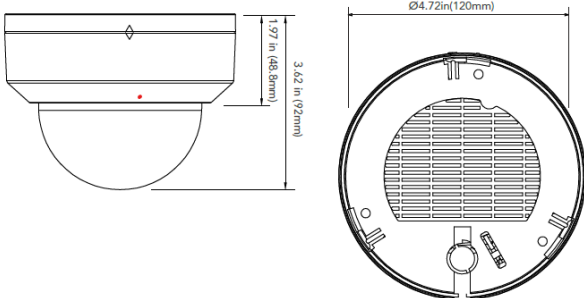

VVK-NSD51F

Specification

CAMERA

Image Sensor	1/2.8" Progressive Scan CMOS
Resolution	5MP
Image Size	2592 x 1944
Min. Illumination	Color: 0.05lux @ F1.2(AGC ON) BW: 0lux w IR ON
Shutter Speed	1/20,000s ~ 1/5s
Slow Shutter	Supported
IR Distance	20M
Lens	Fixed 2.8mm(M12)
Field of View	Horizontal: 107°, Vertical: 57°, Diagonal: 128°
WDR	120dB

VIDEO STREAM

Max. Image Resolution	2592 x 1944 @ 30fps
Supported Resolutions	2592 x 1944, 1920 x 1080, 1280 x 720, 640 x 480, 320 x 240

NETWORK

Ethernet	1 x RJ45 10M / 100M(BASE-T)
ONVIF	ONVIF (Profile S/G/T,20.06)
Protocol	HTTP, HTTPS, FTP, SMTP, UPnP, SNMP, DNS, DDN S, NTP, RTSP, RTP, TCP/IP, PPPoE, DHCP

IMAGE

Day & Night	IR cut filter with auto switch (Day/Night/Auto/Schedule)
True WDR	Yes
Language	Support for English and Korean

VIDEO ANALYTICS

Supported Recorders	Diversity Series
On-Board Storage	Micro SD slot, up to 256GB
Alarm/Audio	No / 1 input (RCA), 1 output (RCA)
Hardware Reset	Yes
Smart Alarm	Recognition (FR) Human & Vehicle Detection (PD&VD) Perimeter Intrusion Detection (PID) Line Crossing Detection (LCD) Cross Counting (CC)
Smart Analytics	H Stationary Object Detection (SOD) Heat Map (HM) Crowd Density Detection (CD) Queue Length Detection (QD) license Plate Detection (LPD) Rare Sound Detection (RSD)

GENERAL

Angle Adjustment	Any Angle
Input Voltage	DC 12V / PoE (IEEE802.3af)
Power Consumption	≤6W
Weight	Approx. 306g
Working Temperature	-30°~55°
Dimensions	Ø120 x 92mm